

SYNC 2000 Protocol Gateway

OVERVIEW

SYNC 2000 Protocol Gateways support more than 40 protocols which are used across utility applications. It features substation rugged hardware with a real time embedded Linux operating system. DNP3.0, IEC 60870-5 101/103/104, DLMS-COSEM, Modbus, MQTT are some of the standard protocols supported in the product, in addition to common proprietary protocols like SPABus, Courier, SEL etc., which are used by legacy utility devices.

FEATURES

Software Features

- Supports more than 40 utility protocols
- Automatic startup, initialization with restart notification following power restoration
- Multi-master communication capability
- Up to 5000 data points supported[#]
- Time sync based on NTP/SNTP/NMEA/protocol specific synchronization (IEC 104/DNP3.0 etc.)
- Transparent/tunneling support for remote configuration
- Remote device management from Kalki.io
- SNMP Agent/ Manager for NMS integration
- Can be used as terminal server
- Web HMI[#]

Reliability

- IEC 61850-3 compliant hardware[#]
- DNV certified IEC 61850 server
- Hot-Standby redundancy[#]

Security

- IEC 62351-3 transport layer security
- IEC 62351-5/DNP3 secure authentication
- SSL based VPN with AES, DES or 3DES encryption over WAN/LAN

Enhanced Capability

- Internal and external pluggable dual SIM cellular modem (GPRS EDGE/CDMA/HSPA/EVDO/LTE)[#]
- External pluggable RF/PSTN modem
- Fiber Optic Ethernet termination[#]
- Wide range of AC and DC power supplies


MODELS

- SYNC 2000 - M1: 2 Serial, 1 Ethernet (Copper)
- SYNC 2000 - M2: 6 Serial, 1 Ethernet (Copper)
- SYNC 2000 - M3N: 4 Serial, 2 Ethernet (Copper)
- SYNC 2000 - M4: 6 Serial, 1 Ethernet (Fiber Optic)

RELATED PRODUCTS

- Kalki.io: Energy IoT Platform
- SYNC 4000: Control Center Gateway

Sample Architecture Diagram

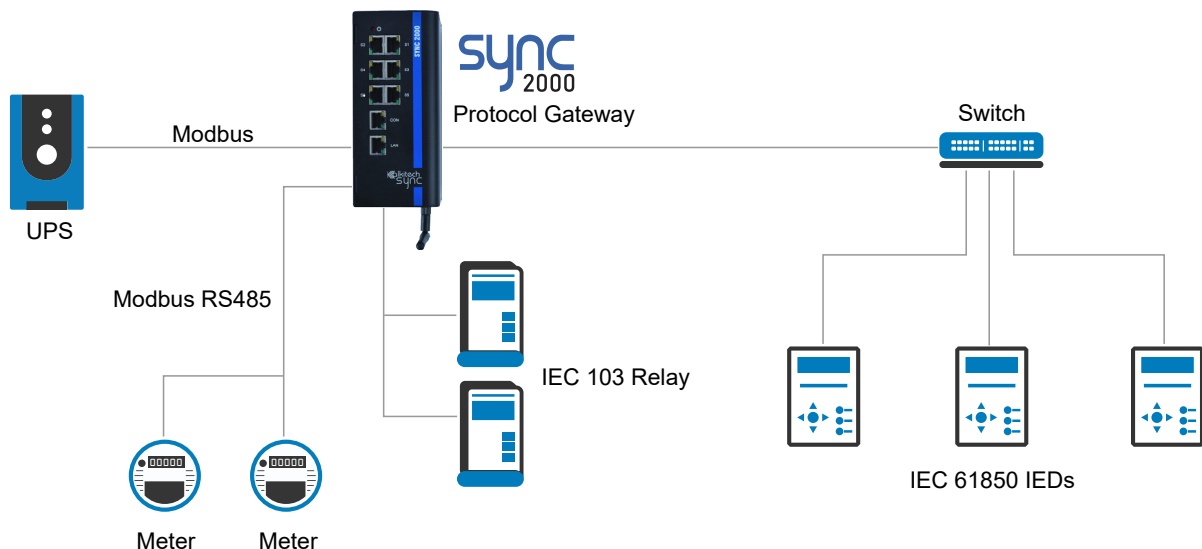

| Specifications | | SYNC 2000 - M1 (S2R1) | SYNC 2000 - M2 (S6R1) | SYNC 2000 – M3N (S4R2) | SYNC 2000 - M4 (S6F1) | |
|--------------------------|---|--|--|---|--|--|
| General | Management | EasyConnect configuration utility/web server/SNMP & SSH Interface over secure network | | | | |
| | Maintenance | Direct over debug port or console port | | | | |
| | System Protocols | TCP/IP, UDP/IP, SMTP, POP, HTTP, FTP, SNMP, ICMP, DHCP, BOOTP, Telnet, DNS, ARP, PPPoE, DDNS | | | | |
| | Device Security | NERC-CIP compliant (refer to implementation document for details), SSHv2 | | | | |
| | Communication Security | IEC 62351-3 and -5 (DNP3 secure authentication), SSL based VPN tunnel using Blowfish/AES/3DES | | | | |
| | Logic Programming | AND/OR/NOT/Bit SHIFT/Split/Index support for digital and analog data delay operations | | | | |
| | Redundancy | Downstream/upstream communication | | | | |
| | | Hot-Standby [#] | NA | Optional | NA | |
| | SMS Based Alarm | Available* | | | | |
| Web HMI [#] | NA | Optional | NA | | | |
| Certifications | IEC 61850-10 DNV GL, IEC61850-3 [#] , CE | | | | | |
| Communication Capability | Standard Protocols [^] | IEC 60870-5-101/103/104, DNP3 serial/TCP, Modbus RTU/ASCII/TCP, IEC 62056-DLMS, IEC 61850 [^] , SFTP, SNMP, SNTP, MQTT | | | | |
| | Proprietary Protocols [^] | ABB - RP570, 571, SPA bus; SEL - SEL451, 421, 311, 300G; Schneider - SEPAM Modbus; Areva - Courier; RTK, EXCOM, CMC Master, SPORT; Triguard peer to peer | | | | |
| | Additional Protocol | Refer to the full list of protocols at https://www.kalkitech.com/knowledge-center/protocols/ | | | | |
| | Multi-master Protocol | No, one-to-one conversion | Yes, many-to-many conversion | | | |
| | Datapoints Supported[#] | | | | | |
| | SPA, IEC 61850 | 800 | 800 | 800 | | |
| | DNP3, IEC 60870, Modbus and other Proprietary Protocols | 5000 | 5000 | 5000 | | |
| | Serial | | | | | |
| | Ports - Connector | 2 x RS232/485 - RJ45 | 4 x RS232/485 - RJ45 2 x RS232 - RJ45 | 3 x RS232/485 - RJ45/TB 1 x RS232 – DB9/TB | 4 x RS232/485 - RJ45 2 x RS232 - RJ45 | |
| | Data Rate | 200 bps – 115.2 kbps | | | | |
| | Ethernet | | | | | |
| | Connector | 1 x RJ45 | 1 x RJ45 | 2 x RJ45 | 1 x ST Fiber | |
| | Physical Layer | 10/100/1000 Mbps [#] | | | | |
| | Isolation | 1500VAC min per IEEE802.3/ANSI X3.263 | | | | |
| | Fiber Optic Option [^] | NA | NA | NA | Multi Mode Fiber | |
| | FO Range | NA | NA | NA | 1200 meter | |
| | I/O Interfaces | Analog | Via R485 expansion module | | | |
| | | Digital | Via R485 expansion module | | | |
| Power Requirements | Power Supply [#] | Option 1 (SYNC 2000 PS-DC1): 19 - 58VDC Option 2 (SYNC 2000 PS-ACDC1) 85 - 264VAC 50 - 60Hz, 100 - 370VDC | | | | |
| | Consumption | | | | | |
| | Main Card | 10W | | | | |
| Plug-in Modem Options | Internal Plug-in Modem | 8W peak | | | | |
| | Internal | GPRS/EDGE/CDMA/HSPA/EVDO/LTE [^] across all models | | | | |
| | External | NA | RF modem, PSTN modem (not a production option/accessory) | | | |
| Physical | Dimensions (max) | 164mm x 71mm x 140mm | | | | |
| | Weight | 1000 grams (excluding modem) | | | | |
| | LED Indications | Power, LAN link/status, serial port RX/TX | | | | |
| | Mounting | DIN Rail | | | | |
| Environmental | Cold Temperature test | As per IEC 60870-2-2 tested at -40°C | | | | |
| | Hot Temperature test | As per IEC 60870-2-2 tested at 70°C | | | | |
| | Humidity test | As per IEC 60870-2-2 95% RH 25°C and 55°C for 4 days | | | | |
| | Barometric Pressure test | IEC 60870-2-2 Ed 1.0 Test range 0 (91.6 kPa) to 3000m (70.0 kPa) | | | | |
| | Vibration test | As per IEC 60870-2-2, Class Bm, 5-500 Hz- displacement 3mm 5-9Hz+A1, acceleration 1g for 9Hz-200Hz, 1.5g for 200Hz-500Hz | | | | |
| | Shock test | As per IEC 60870-2-2 10g in X,Y, Z axis | | | | |
| Emission | Conducted Emission | EN 55022: 2006+A 1: 2007 Class A | | | | |
| | Radiated Emission | EN 55022: 2006+A 1: 2007 Class A | | | | |
| Immunity | Radiated Susceptibility | IEC 61000-4-3: 2006 80-100MHz: 10V/m 80% AM, 1 kHz sine wave | | | | |
| | Electrical Fast Transient | IEC 61000-4-4: 2004 ±4 kV serial ports, Ethernet port, DC Power Ports | | | | |
| | Electrostatic Discharge | IEC 61000-4-2: 2001 ±6 kV Contact Discharge, ±15 kV Air Discharge | | | | |
| | Surge Protection | IEC 61000-4-5: 2011 Serial port ±4kV, 1.2/50 µs for common mode, Ethernet port ±2kV, 1.2/50 µs for common mode DC Power port ±2kV, 1.2/50 µs for common mode, ±1 kV, 1.2/50 µs for differential mode AC Power port ±4kV, 1.2/50 µs for common mode, ±2 kV, 1.2/50 µs for differential mode | | | | |
| | | Induced (Conducted) RFI | IEC 61000-4-6: 2004 0.15 - 80 MHz: 10 Vrms 1 kHz, 80%AM for DC power, serial and Ethernet port | | | |
| | | Power Frequency Magnetic Field immunity | IEC 61000-4-8: 2001 30 A/m continuous & 1000 A/m for 1 sec | | | |
| | | Damped Oscillatory Magnetic fields immunity test | IEC 61000-4-10 Magnetic field strength 30 A/m @ Oscillation frequency 1MHz | | | |
| | Damped Oscillatory Wave immunity | IEC 61000-4-18 Damped Oscillatory Frequency: 1 MHz Common Mode: up to ±2.5 kV Differential Mode: up to ±1.0 kV for power port 1 MHz Common Mode: up to ±2.5 kV for serial port and Ethernet port | | | | |
| | Impulse voltage Immunity | IEC 60255-5 2000-12, Ed2.0 ±5kV for power port and earth | | | | |
| | Conducted Common mode disturbances Immunity | IEC 61000-4-16 Ed 1.1 30/300V at 50Hz, 3V/30V at 15 to 150kHz | | | | |
| Power Supply | DC Voltage Dips & Interrupts | IEC 61000-4-29: 2000 - 0% short interruption for 0.03 sec, 40% and 70% dips for 0.3 sec, 80% & 120% variation for 3 sec | | | | |
| | Ripple on DC power line immunity test | IEC 61000-4-17 10% of the Nominal DC voltage AC line frequency 50Hz on DC power port | | | | |
| | AC Voltage Dips & Interruption | IEC 61000-4-11 - AC Power port 0% short Interruption for 250 cycles, 0% of AC mains voltage for 0.5 cycles and 1 cycles, 40% dips for 10 cycles, 70% dips for 25 cycles, 80% dips for 250 cycles | | | | |
| | AC Voltage Range and Tolerance test | IEC 60870-2-1 Ed 2.0 176 Vac (-20 %) to 253 Vac (+15%) | | | | |

* Available when packet data is not used; ^ Required to be ordered separately (Dual SIM model available for M2 and M4 variants); # Model dependent